


FTB-A Fiber Optic Termination Box

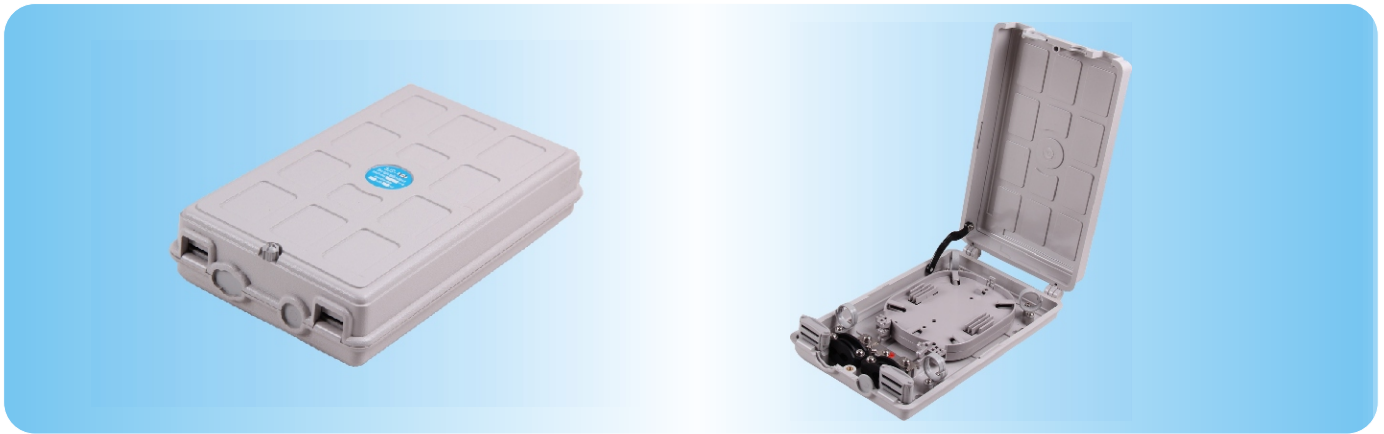

Product Introduction:

Termination box FTB-A is suitable for jointing fiber to pigtail and it protects fiber splice s and helps to distribute. It is a wall mounting type or desktop type, which is used in telecommunication room.

Features

- High-strength polycarbonate plastic material.
- Cable fixing device.
- Fiber optic splice tray.
- Big fiber storage space.
- Easy installation and maintenance.

Technical data:

- ◆ Insulating resistance: $\geq 2 \times 10^4 \text{M}\Omega/500\text{V}$ (DC).
- ◆ Voltage resistance strength: no breakdown or arc over between the metallic components, between metallic components and the ground at DC 15KV for 1 minutes.
- ◆ The fiber curved radius : $> 30\text{mm}$.
- ◆ Service life: 20 years.
- ◆ Air pressure: 70KPa ~ 106KPa.

Ordering Information:

Model	Dimension (mm)	No. of Ports	Splice tray	Unit	Max Capacity
FTB-A I	265×153×55	2xφ20mm	6F Splice tray (1 pc of tray 009)	Set	6 F
FTB-A II	265×153×55	2xφ20mm	6F Splice tray (2 pcs of tray 009)	Set	12 F
FTB-A III	265×153×55	2xφ20mm	6F Splice tray (3 pcs of tray 009)	Set	18 F
FTB-A IV	265×153×55	2xφ20mm	6F Splice tray (4 pcs of tray 009)	Set	24 F