


FTB-H Fiber Optic Termination Box

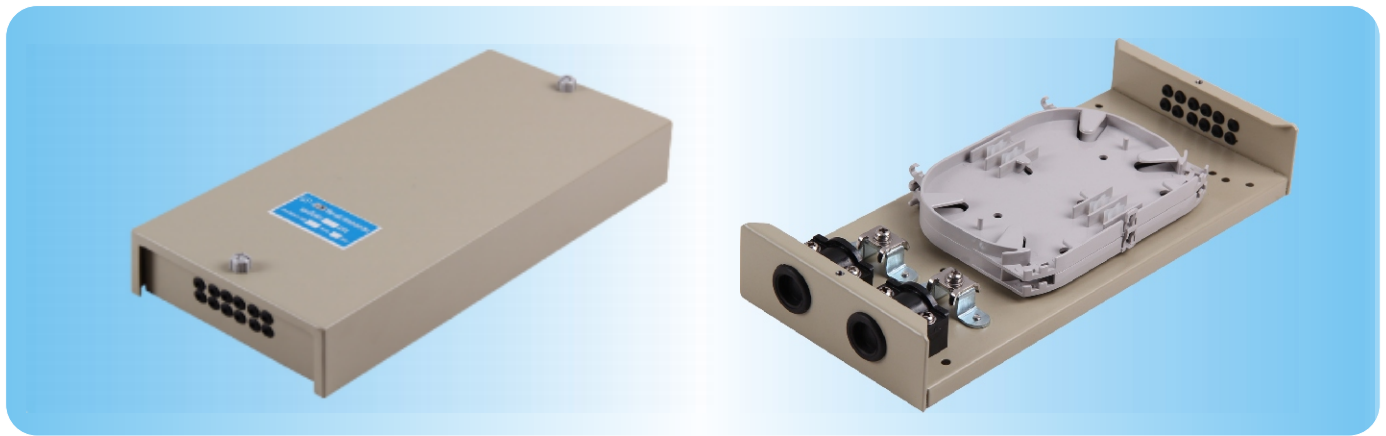

Product Introduction:

Termination box FTB-H is suitable for jointing fiber to pigtail and it protects fiber splice s And helps to distribute. It is a wall mounting type or desktop type, which is used in telecommunication room.

Features

- High quality steel plate with powder coating, high mechanical strength, good looking appearance.
- With cable fixing device, fiber splice tray, Fiber optic splice tray.
- Splice tray with overturn structural, the open angle >90°.
- Earthing deriving device.
- Ample fiber storage space..
- Single-ended inlet/outlet port.

Technical data:

- ◆ Insulating resistance: $\geq 2 \times 10^4 \text{M}\Omega / 500\text{V (DC)}$.
- ◆ Voltage resistance strength: no breakdown or arc over between the metallic components, between metallic components and the ground at DC 15KV for 1 minutes.
- ◆ The fiber curved radius : >30mm.
- ◆ Service life: 20 years.
- ◆ Air pressure: 70KPa ~ 106KPa.

Ordering Information:

Model	Dimension (mm)	No. of Ports	Splice tray	Unit	Max Capacity
FTB-H-I	302×135×42	2xφ20mm	12F Splice tray (1-2 pcs of tray 024)	Set	24 F
FTB-H-II	302×135×62	2xφ20mm	12F Splice tray (3-4pcs of tray 024)	Set	48 F
FTB-H-III	302×135×80	2xφ20mm	12F Splice tray (5-6 pcs of tray 024)	Set	72 F
FTB-H-IV	302×135×100	2xφ20mm	12F Splice tray (7-8pcs of tray 024)	Set	96 F