


# FTTX Dome Optic Splice Closure

## Overview

EFON FTTH-S004 Series FTTH Dome Splice Closures are designed for FTTH drop locations where drop cables are spliced to distribution cables. IP68 protection.

## Features

- The closure casing is made of quality engineering plastics, and of good performance of anti-erosion against acid and alkali salt, anti-aging, as well as pleasing appearance.
- The mechanical structure is reliable and has the performance of resisting wild environment.
- Chemical and mechanical resistance for all the aerial application areas in the fiber networks.
- Cover most of the applications in the premise wiring networks like Fiber To The Home (FTTH)
- Can accommodate up to 36 drop cables.
- Convenient attachable splitter module with 1:8, 1:16, 1:32 splitter
- 72 Cores fusing splice.
- Aerial, wall-mounting, pole-mounting.

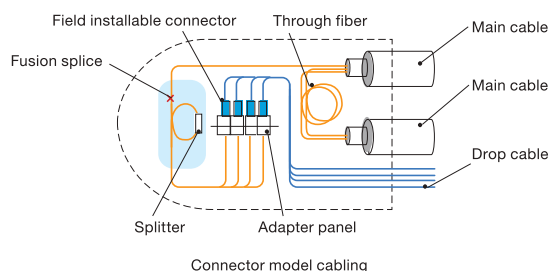

Dimensions and Capability		
Dimensions (L*W*H)	230mm*435mm	
Material	Molded plastic	
Cable Diameter	Main cable	4 PC
	Drop cable	φ3, φ5, 2×3 mm: up to 36 PCS
Cable Ports	Optional sealing adapter φ3, φ5, φ7, 2*3mm drop cable. φ 7-22mm main cable.	
Maximum Fiber Storage Capacity	Single-fiber	72 splices points
No. of Optical Adapter	Max. 36×SC adapter	with 1*32 or 2*1:16 splitter module