
Outdoor Optical Cross Connection Cabinet


- GPX-EF series outdoor cabinet.
- For outdoor applications
- Weather proof and dust proof, meeting IP65
- Double-walled sides, rear panel and door, providing thermal regulation.
- Thermosetting fiberglass-reinforced polyester cabinets can endure climate changes and adverse environment, and are rust proof
- Well protected from accidental or malicious damages
- Complete cable routing design with fiber bend radius over 40mm
- Modular design and easy installation, modules are exchangeable
- Optimal management for patch cords with fiber storage units
- Suitable for ribbon and non-ribbon optical fibers
- Capacity up to 144 ports for size 2; 288 ports for size 1; 720 ports for size 5
- Tri-point-locking ensure safe and reliable
- Splitter tray available
- Front access for ODF-OC1 and ODF-OC2; front and Back access for ODF-OC5
- Optional splice tray for direct splice available for ODF-OC5





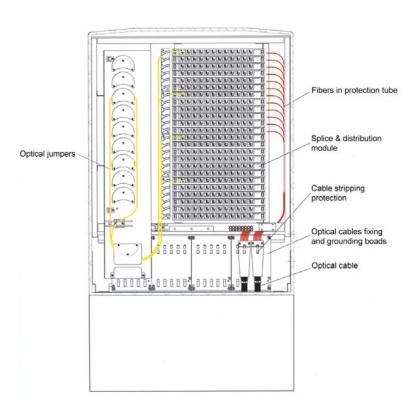

Splice and distribution modules can be inserted in and pulled out freely for operations.

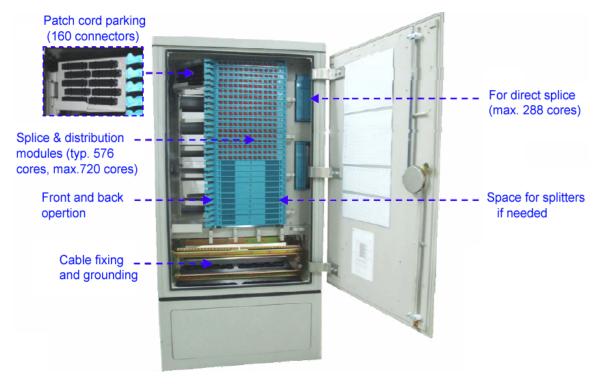

ODF-OC5



Patch Cord Parking

Splice & Distribution Module

- Capacity up to 12 ports
- Combined splice and distribution
- Suitable for ribbon and non-ribbon cables
- Oblique installation of adapters
- Suitable for installation with FC, SC, LC and ST adapters





Ordering Information

Example: EFOC - \underline{SMC} \underline{M} - $\underline{288}$ \underline{FC}

1 Body Material SMC=SMC,

2 Accessary Type M = Module; NPM=No Patch Module;

3 Number of Ports 12, 24, 48, 72, 96, 144, 576, etc.

4 Adapter Type FC, SC, ST, etc; Blank = unloaded

Note: Cabinet will include all necessary modules and accessories.

Ordering Guide

		Dimension		Max. Capacity
Cabinet	EFOC-SMC-288	Excluding the base	1100 x 750 x 360 mm ³	288 ports
		Including the base	1450 x 750 x 360 mm ³	
	EFOC-SMC-144	Excluding the base	695 x 520 x 280 mm ³	144 ports
		Including the base	955 x 520 x 280 mm ³	
	EFOC-SMC-576	Excluding the base	1100 x 756 x 625 mm ³	576 ports
		Including the base	1550 x 756 x 625 mm ³	